

# Easy Clean Waste | Acrylic



## PRODUCT FEATURES

- Recommended Waste for Newline Acrylic Trays
- 125mm Depth from Top Flange to Outlet
- Easy to Clean and Easy to Maintain
- Chrome Plated Grill Cap
- Compatible with Acrylic Trays with a Standard 90mm Waste Hole

## FINISHES AVAILABLE




Black



Chrome

\*Sold Separately

## SPECIFICATIONS

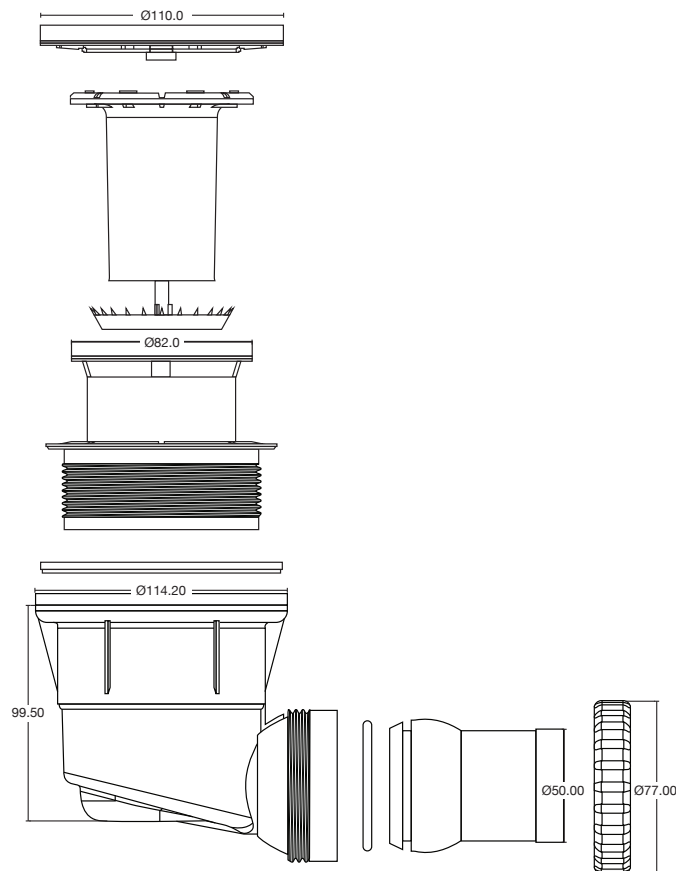

### DESCRIPTION:

The Newline Easy Clean Waste is the recommended waste for all Newline acrylic shower trays. It is also compatible with acrylic trays that have a standard 90mm waste hole.

The Waste comes with a chrome plated grill cap. Black and Chrome replacement caps are also available, however these are sold separately. The waste measures 125mm from the top flange to the outlet.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1(c) (i)(ii) & B2.2.2 (b): Newline Easy Clean Wastes have a warranted durability of 5 years when maintenance standards are adhered to. Wastes are installed as components of a building system and can be replaced with removing building elements that have greater durability. Refer to installation guide, warranty document and aftercare document for further information.

G13: The Newline Easy Clean Waste is designed to convey foul water from sanitary fixtures, e.g. shower trays, to a properly plumbed drainage system. The inner cup, sieve and hair catcher can be regularly removed for cleaning purposes, providing reasonable access to maintain and clear blockages.

### SCOPE OF USE

Newline Easy Clean Wastes are intended for use in the following environments:

- Domestic and commercial bathrooms with acrylic trays that have a standard 90mm waste.
- Suitable for use with cold and warm water.
- Not suitable to be used where permanently concealed.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer:  
Newline Group Ltd

Importer Address for Service:  
54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline Easy Clean Acrylic Wastes are intended for use under regulated water pressure and temperature that does not exceed 55 degrees Celsius, have heavy mineral loadings, geothermal qualities, or pH imbalance.
- Inside elements/parts are not included in Easy Clean Waste warranty according to B.2.2 (B). Inside elements carry a 2-year warranty.
- Must be installed in accordance with Newline Easy Clean Waste instruction manual. Newline recommends using a licensed plumber to conduct the installation to ensure best outcome.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should not be used. Full list is outlined in Aftercare Document.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Easy Clean Waste Instruction Manual](#)