

Important!

1. When you receive your Channel Drain set, check that it is free of freight damage.
2. Advise Newline 0508 639 5463 of any fault within 12 hours of receiving goods.
3. Any installation of incorrect or damaged product will invalidate later claims.

PLEASE READ CAREFULLY BEFORE COMMENCING INSTALLATION

WARRANTY

- Faulty goods supplied are covered under warranty. Visit **newline.nz** for details.

HEALTH AND SAFETY

- Determine location of wiring and piping. Mark these positions clearly prior to commencing the project.

CHANNEL DRAIN COMPONENTS SUPPLIED (DIAGRAM “A”)

- Newline Stainless Steel Channel Drain base and Top Insert (length as ordered)
- Waste Leakproof Flange
- Dropper Pipe and two bends
- Shaped Channel Drain Support Packers
- Spacer Clips: Channel base to insert — Installed to protect scuffing of Stainless Steel or Black finishes.

SPECIFICATIONS

- Page 4 gives dimensions that apply to this Channel Drain system layout.
- The Channel Drain height including the packers is 36mm excluding glue to bond the packers to the substrate.
- The substrate must have no deflection and a surface preparation for gluing.

IMPORTANT!

1. The channel discharge pipe is offset by 75mm either way. Mark the centre line of the floor area and then the LH or RH option for the preferred off-set position. Cross check marked position with the Channel Drain in place.
2. The installation of the waste fittings must be installed by a registered plumber to ensure drainage complies with building regulations.
3. Bond Waste Flange and the Channel Drain packers to floor prior to waterproofing and tiling.


NOTE:

1. These instructions cover a Chane! Drain set only and is aligned to Newline designs. If this is used outside these outlined steps, ensure all this complies with council regulations.
2. The combined Newline Channel Drain and ProFinish Tile tray base system is covered in other Instructions.

AFTERCARE AND MAINTENANCE

Flush through drain system only with light detergent and water. Do not use any solvent, organic based or abrasive cleaners.

Diagram A

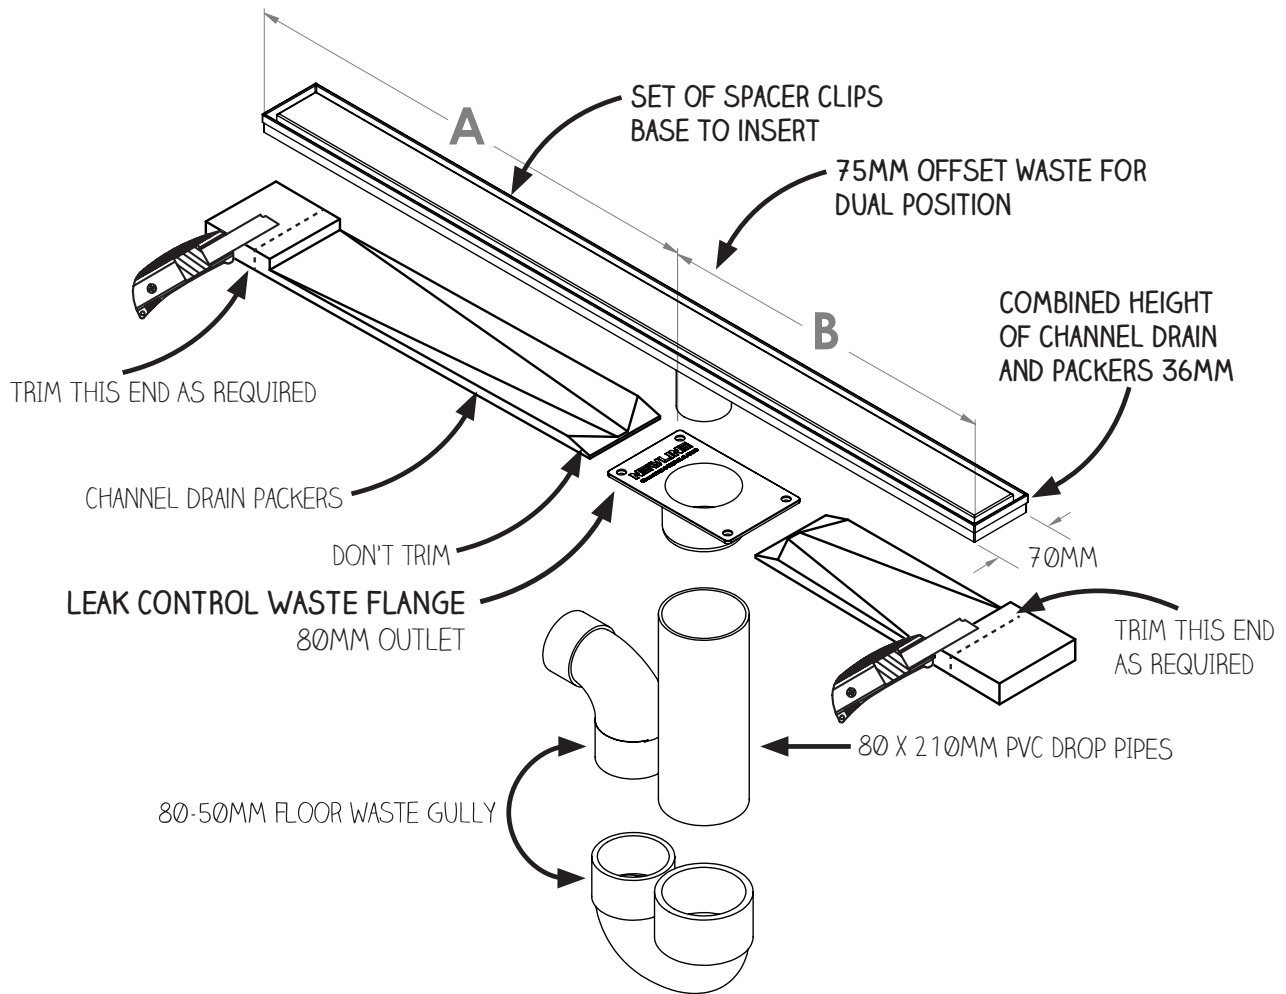

CHANNEL DRAIN SIZES

NEWLINE CHANNEL DRAIN KIT	L x D x H	OFFSET A	OFFSET B
CHANNEL DRAIN 710	710 x 70 x 23	430mm	280mm
CHANNEL DRAIN 810	810 x 70 x 23	480mm	330mm
CHANNEL DRAIN 910	910 x 70 x 23	530mm	380mm
CHANNEL DRAIN 1110	1110 x 70 x 23	630mm	480mm
CHANNEL DRAIN 1310	1310 x 70 x 23	730mm	580mm
CHANNEL DRAIN 1510	1510 x 70 x 23	830mm	680mm
CHANNEL DRAIN 1710	1710 x 70 x 23	930mm	780mm
CHANNEL DRAIN 1910	1910 x 70 x 23	1030mm	880mm

All Channel Drain sizes are available in Stainless Steel, Professional Black Finish or with a Tile Insert.

Installation Steps: Plumbers Guide - Waste Location

Positioning of Channel Drain: Leak Control Waste Outlet

DIAGRAM B

- Exclude 60mm for a Hob if applicable.
- Mark the centreline on the floor allowing 10mm for any wallboard not installed to framing.


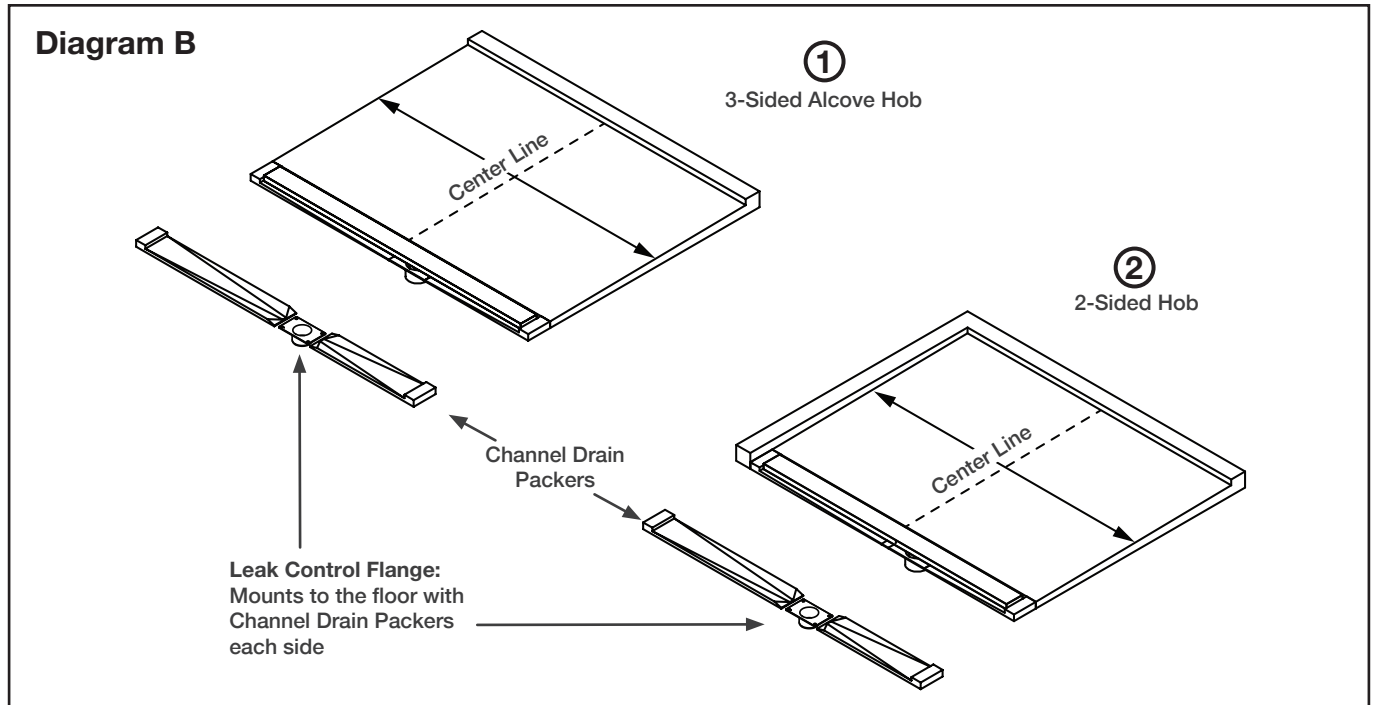


DIAGRAM C

- With template mark the optional waste position allowing for 10mm wallboard on back wall.

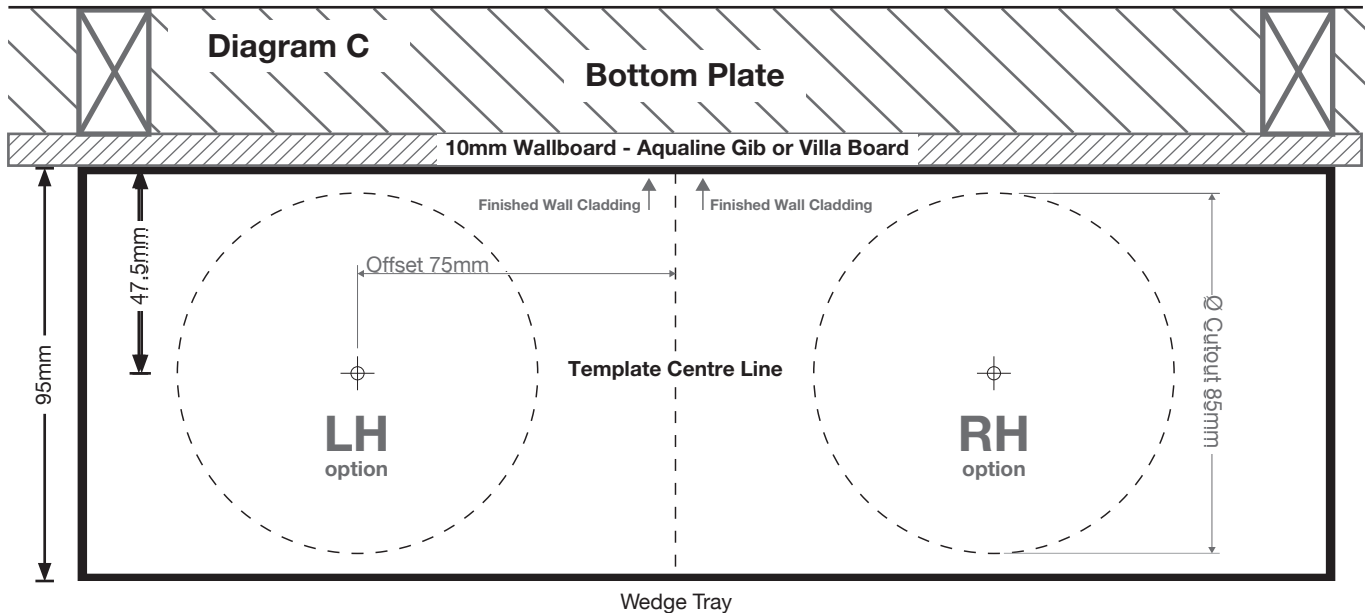

CONTACT

NEWLINE
for a lifetime!

54 Unutoto Place, Tauriko, Tauranga, 3171
 Freephone: 0508 639 5463 Phone: 09 444 2053
 Email: info@newline.co.nz newline.nz