





PRODUCT FEATURES

- No traditional waterproof membrane required
- Single sheet acrylic liner is the waterproof membrane
- Solid resin tray with 40mm upstands on all 4 sides
- Proven tile shower solution
- Frameless hinged door - 10mm Safety Glass
- Door hardware available in Chrome, Black, Brushed Brass, Brushed Nickel, and Gun Metal

TRAY DETAILS

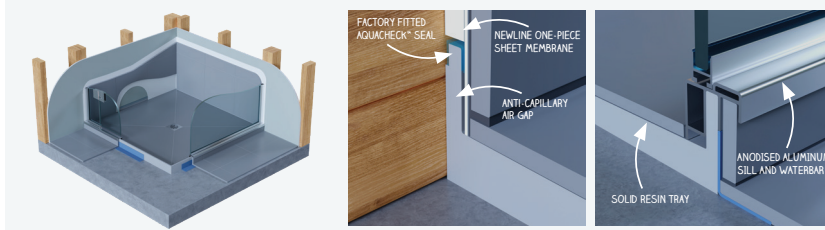

SPECIFICATIONS

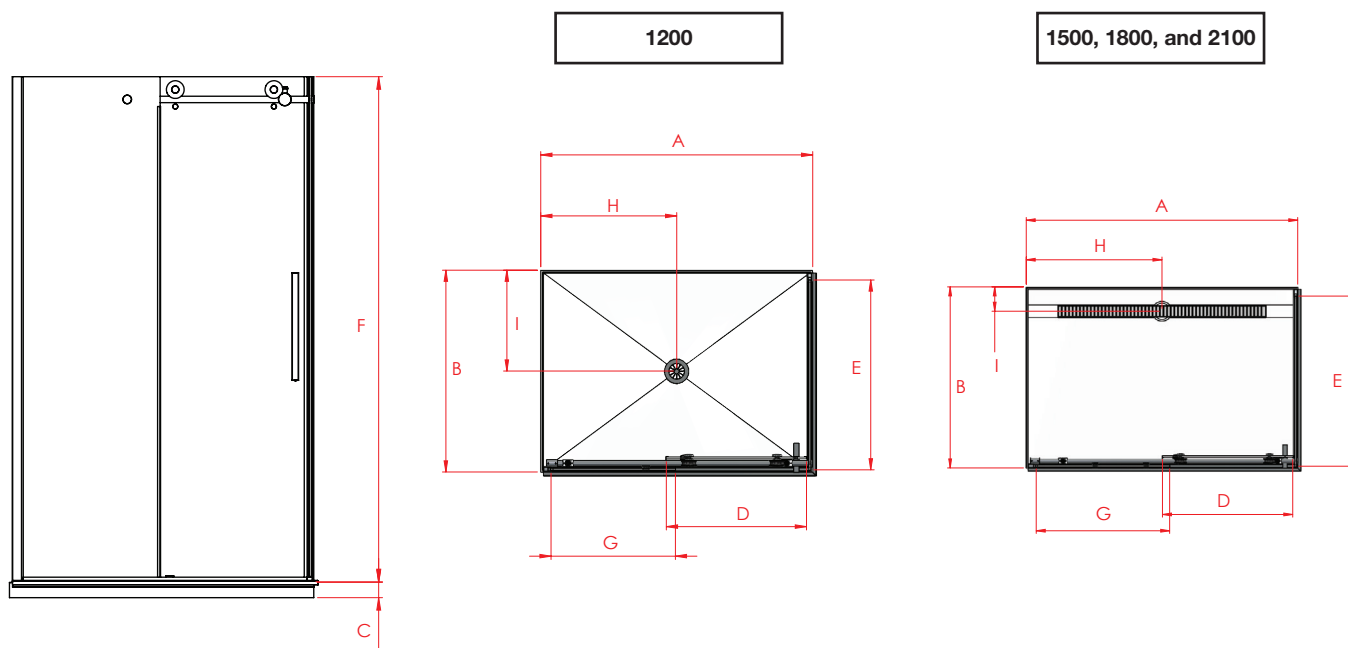

	TRAY			DOOR				WASTE	
	A	B	C	D	E	F	G	H	I
1200x900	1200	900	60	620	840	1998	550	602	447
1500x1000	1500	1000	60	720	940	1998	737	750	134
1800x1000	1800	1000	60	820	940	1998	947	900	134
2100x1000	2100	1000	60	820	940	1998	660	1047.5	134

PRODUCT DISCLOSURE

COMPONENT ONE: DryFit™ System

CLASS: One

DESCRIPTION:

The Newline DryFit™ Shower System is a New Zealand designed and manufactured, wall and floor shower substrate system, incorporating functioning water-stops for both wall and floor junctions, and once installed, it is ready to receive a tiled or stone finished surface.

The Newline DryFit™ Shower System consists of an acrylic sheet membrane for wall applications and a composite resin shower base that is formed with an internal corner upstand with the acrylic sheet liner installed over, forming a waterproof seal. It incorporates either a central waste outlet or a strip-drain waste outlet. The Newline DryFit™ Shower System is manufactured in various sizes and shapes and a one-piece moulded DryFit™ niche is available in various sizes.

The Newline DryFit™ Shower System is available in a range of standard sizes from 900x900 up to 2100x1000 and cannot be customized. The system is compatible with hinged and sliding door options.

CONTRIBUTIONS TO COMPLIANCE

B2 Durability: Performance B2.3.1 (b) and B2.3.2: When exposed to normal conditions of the environment and subjected use, the Newline DryFit™ Shower System is intended to have a minimum life period of 15 years and to be compatible with ceramic and stone tile finishes that have a serviceable life of between 15 to 25 years. Refer to DryFit™ Appraisal for more information.

E3 Internal Moisture: Performance E3.3.2 to E3.3.6: When installed to the provisions outline in the Newline DryFit™ Manual, and the requirements of the DryFit™ appraisal, the Newline DryFit™ shower system will prevent the passage of moisture from penetrating behind floor and wall linings or entering concealed spaces. List of fall positions and compliance standards are outlined in the DryFit™ Appraisal Document.

F2 Hazardous Building Materials Performance F2.3.1: The Newline DryFit™ Shower system is non-toxic. Suitable PPE gear and breathing mask should be worn, especially if cutting, to prevent exposure of skin and eyes to dust and debris. Refer to DryFit™ appraisal document for more information.

SCOPE OF USE

Newline Acrylic Liners are intended for use in the following environments:

- Over floor substrates of concrete, plywood, compressed fibre cement sheet and tile and slate underlay fiber cement sheeting.
- When a finished surface of ceramic or stone tile is installed to the conditions outlined in the Newline DryFit™ Manual - Version 0623.
- When the floor substrate structure has been designed and constructed to ensure that deflections in the substrate do not exceed 1/360th of the span of the building elements used to construct the substrate.
- When the Newline DryFit™ Shower System is installed by an accredited applicators of product type, or Accredited applicators.
- Applications such as residential housing, commercial bathrooms, hotels and apartments.
- For full scope of use required, refer to DryFit™ appraisal and installation manual.

CONDITIONS OF USE

- Refer to appraisal for full scope of system. The DryFit™ system must be installed according to the DryFit™ installation manual.
- Installation of the Newline DryFit™ Shower System must be performed by a licensed plumber for the waste outlet connection. Product components can only be installed by an approved applicator who has completed the required product training.
- Store materials in a dry, frost-free environment away from direct sunlight. A regular check of finished surfaces is recommended. Refer DryFit™ appraisal for more information.

WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

COMPONENT TWO: Glass Doorset

CLASS: One

DESCRIPTION:

Newline Door Sets are used in conjunction with the DryFit™ system, to create a full shower enclosure. Doors are all manufactured from safety glass (NZ Standards AS/NZS 2208) with aluminum framing, and may include components of other hardware, including, but not limited to, handles, hinges, and clips.

Newline door sets have variations suitable for use in both acrylic and tile 2-Sided, Alcove, Curved and Neo shower enclosures. They are available in a range of standard sizes from 750mm up to 2100mm, and have custom options. Newline door sets are also available in different screen heights, from 1830mm up to 2000mm, with custom options available. Hardware colour options include chrome, white, black, brushed brass, brushed nickel, and gun metal.

CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i), (ii) & B2.2.2 (b): Newline Door Sets have a warranted durability of between 5-10 years, when maintenance standards are adhered to. Door sets are installed as components of a building system and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare Document for further information.

E3.3.5: Newline Door Sets are likely to be splashed throughout the intended use of the building. Door sets are impervious. Seals should be fitted correctly to ensure water tightness, refer to installation guides for more information.

SCOPE OF USE

Newline door sets are intended for use in the following environments:

- Domestic and commercial bathrooms, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Compatible with acrylic trays and linings, and tiled floors and walls that meet installation requirements outlined in relevant installation guides.
- Check door height before installation. Screen heights compatible with standard stud height, but this should be checked prior to installation.

WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

CONDITIONS OF USE

- Newline door sets are intended for use under regulated water pressure and temperature that does not exceed 55 degrees Celsius, have heavy mineral loadings, geothermal qualities, or pH imbalance.
- Working parts and PVC seal durability is not included in door set durability period according to B2.2.2 (b). All working parts and PVC seals carry a 12-month warranty.
- Water leakage will occur in frameless glass showers if the shower rose is pointed directly at the door. An acrylic seal package will help to prevent water spillage.
- Must be installed in accordance with Newline Acclaim 2S and 3S Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should not be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced shower installer or tradesman to ensure best outcome.

CONTACT DETAILS & SUPPORTING DOCUMENTATION

CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: newline.nz

Importer Email: info@newline.co.nz

Importer Phone Number: 0508 NEWLINE

SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

Please contact Newline for the DryFit™ installation manual and appraisal document.