

Rollaway | Shower Screen




PRODUCT FEATURES

- Alloy Casing - White Frame
- Opaque Screen - Durable Construction
- NZ Made
- Easy Clean - mould and mildew resistant
- 1800mm High - Standard Height
- Adjustable Width - 925mm Maximum Closure
- Compact Solution - Ideal for Motor Homes

Please note: Rollaway height can only be customized shorter than 1800, not taller.

SPECIFICATIONS

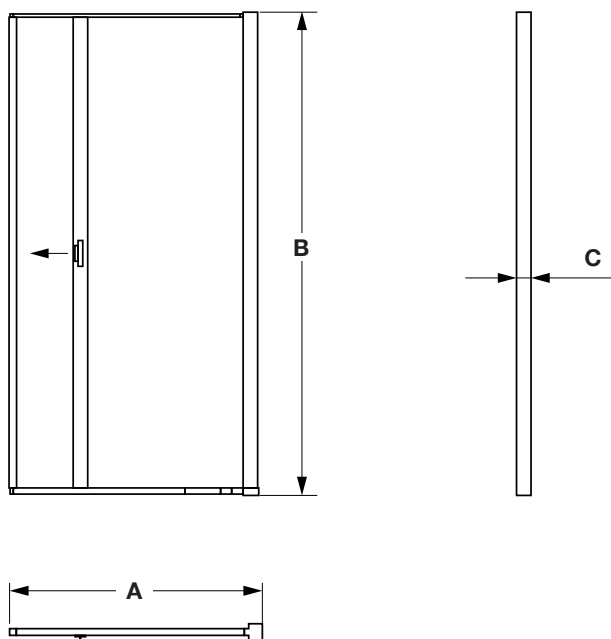

DOOR x RETURN	DOOR SET*		
	A	B	C
925x1799	925.15	1799	59

DESCRIPTION:

Designed for use in smaller spaces such as trailers and caravans, the Rollaway shower screen operates similar to a roller blind, featuring a flexible screen that rolls open and closes within its frame. The Rollaway is made from semi-opaque material, meaning the screen is not completely transparent to provide privacy. The wiper blade on the canister acts as a self-cleaner, wiping the screen when it is rolled back into the canister. The Rollaway has a standard height of 1800mm however can be customized shorter than this, and has an adjustable width, with 925mm as the maximum closure.

CONTRIBUTIONS TO COMPLIANCE

E3.3.5 and E3.3.6: The Newline Rollaway shower screen is constructed from impervious material that is easily cleaned and is mould and mildew resistant. When installed correctly, there is no provision for water to leak through the roller tracks. Refer to installation manual for more information.

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): The Newline Rollaway has a warranted durability of 5 years when maintenance standards are adhered to. Screens are installed as components of a building system and can be replaced without removing building elements that have greater durability. Refer to installation manual and Aftercare Document for further information.

G1.1 (a) and G1.3.2: Featuring an in-built wiper blade, the Rollaway shower screen is cleaned when rolled back into the canister. Regular cleaning routines to maintain hygienic standards should still be maintained, refer to Aftercare and Maintenance Document.

SCOPE OF USE

Newline Acrylic Liners are intended for use in the following environments:

- Domestic bathrooms where space is limited, including tiny homes, caravans, or smaller residential bathroom spaces such as sleep-outs.
- Suitable for use with cold and hot water.

WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer:
Newline Group Ltd

Importer Address for Service:
54 Unutoto Place, Tauranga, 3171

Importer Website: newline.nz

Importer Email: info@newline.co.nz

Importer Phone Number: 0508 NEWLINE

CONDITIONS OF USE

- Newline acrylic trays are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Rollaway Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner shouldn't be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced shower installer or tradesman to ensure best outcome.

SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Instruction Manual](#)