


# Bath Liner 2s

## Spec Drawings

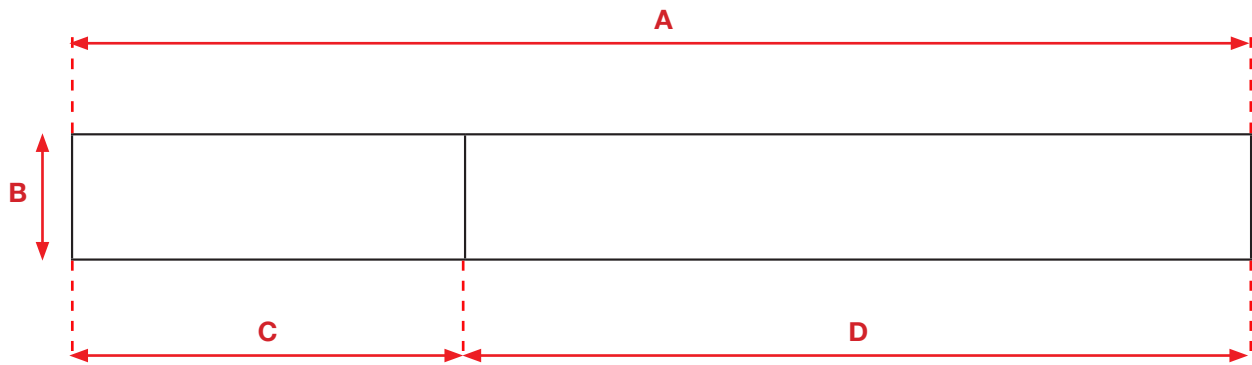

---

CODE	DESCRIPTION	SPECS			
		A	B	C	D
M4289	Newline 2S Bath Liner 1525 x 300	2245	300	730	1515
M4302	Newline 2S Bath Liner 1655 x 300	2375	300	730	1645

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:


[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Instruction Manual](#)

# Bath Liner 3s

## Spec Drawings

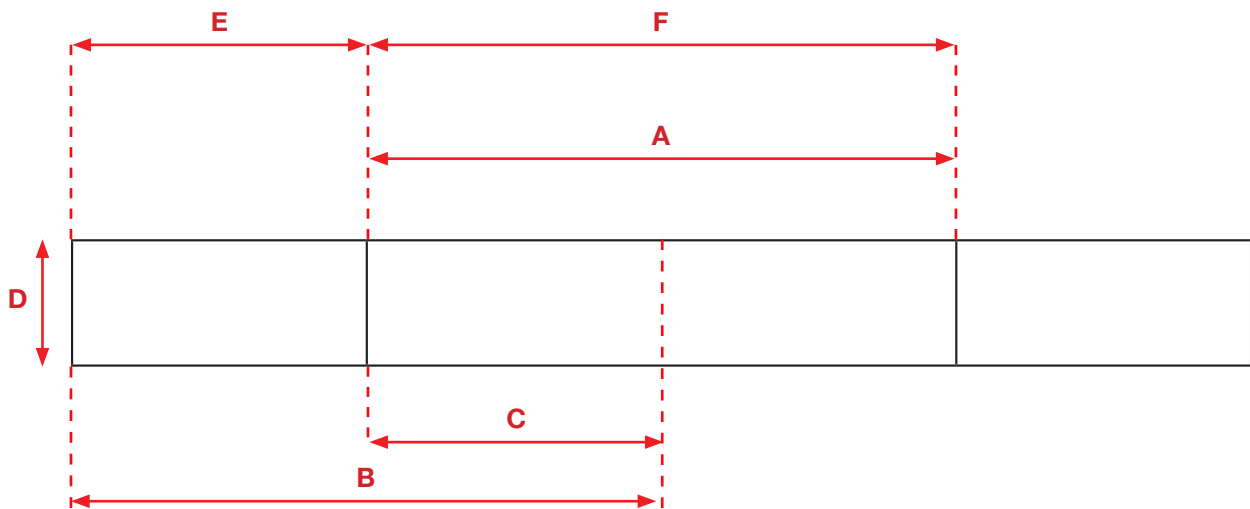

CODE	DESCRIPTION	SPECS					
		A	B	C	D	E	F
M4296	Newline 3S Bath Liner 1525 x 300	1500	1480	750	300	730	1505
M4319	Newline 3S Bath Liner 1655 x 300	1630	1545	815	300	730	1635

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:


[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Instruction Manual](#)

# Laundry Tub Liner 2s

Spec Drawings

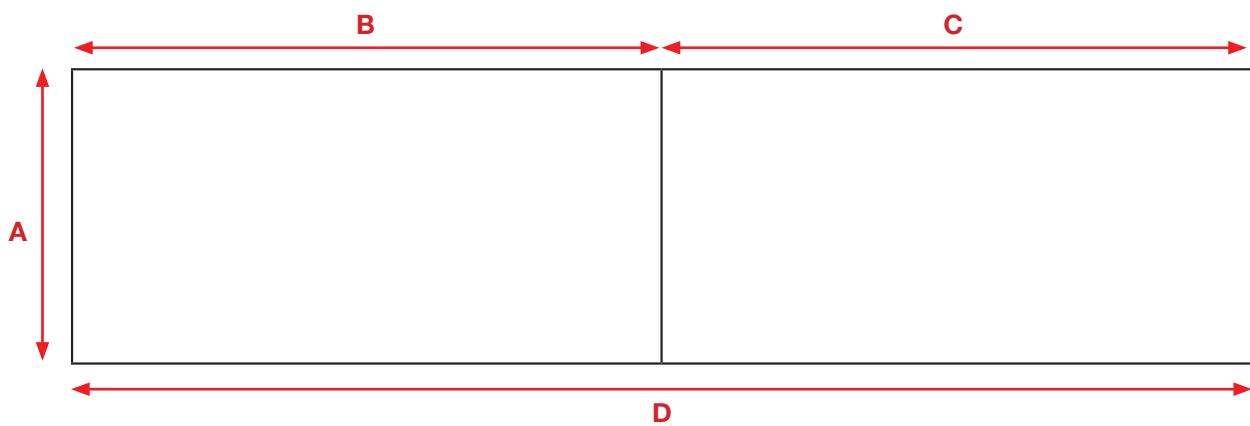

---

CODE	DESCRIPTION	SPECS			
		A	B	C	D
M4241	Newline 2S Laundry Tub Liner 350 x 565 x 300	300	565	350	915
M4265	Newline 2S Laundry Tub Liner 558 x 565 x 300	300	558	565	1123

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:


[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Instruction Manual](#)

# Laundry Tub Liner 3s

Spec Drawings



---

CODE	DESCRIPTION	SPECS	
		A	B
M4258	Newline 3S Laundry Tub Liner 350 x 565 x 300	300	350
M4272	Newline 3S Laundry Tub Liner 558 x 565 x 300	300	558

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[Aftercare and Maintenance Doc](#)


[Warranty Information](#)

[Instruction Manual](#)



# Vanity Liner

Spec Drawings



---

CODE	DESCRIPTION	SPECS	
		A	B
M210	Newline Vanity Liner 600 x 300	600	300
M4227	Newline Vanity Liner 750 x 300	750	300
M4234	Newline Vanity Liner 900 x 300	900	300

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:


[Aftercare and Maintenance Doc](#)

[Warranty Information](#)

[Instruction Manual](#)

# Acrylic Sheet Liner

Spec Drawings

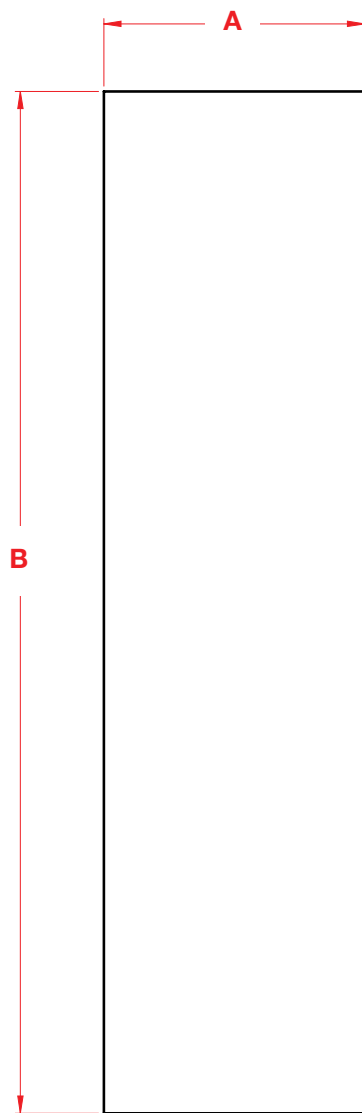

---

CODE	DESCRIPTION	SPECS	
		A	B
M4326	Newline Acrylic Sheet Liner 600 x 2350	600	2350
M4333	Newline Acrylic Sheet Liner 750 x 2350	750	2350
M4340	Newline Acrylic Sheet Liner 900 x 2350	900	2350

# Product Disclosure

## ACRYLIC SPLASHBACKS

CLASS: ONE

**DESCRIPTION:** Newline Acrylic Splashbacks are a form folded one piece lining with no joins, made from high gloss, stress resistant antibacterial acrylic. Acrylic sheet is European made, ranging in thickness from 1.5mm to 2mm.

Acrylic splashbacks are suitable for use in two sided and three-sided configurations. They are available in a range of standard sizes to suit bath tubs, laundry tubs and vanities.

### CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (c) (i) and (ii) and B2.3.2 (b): Newline Acrylic Splashbacks have a warranted durability of 10 years when maintenance standards are adhered to. Splashbacks are installed as a separate component of a bath tub, laundry tub or vanity unit, and can be replaced without removing building elements that have greater durability. Refer to installation guides and Aftercare documentation for more information.

G1.1 (a) and G1.3.2: Newline Acrylic Splashbacks are made from easy clean acrylic. Regular cleaning routines to maintain hygienic standards are outlined in Aftercare and Maintenance document.

E3.3.4 and E3.3.6: Newline Acrylic Splashbacks prevent water from entering wall cavities and causing structural damage, by maintaining a durable barrier against dampness and potential mold growth. Acrylic splashbacks are sealed at all joins, meaning there is no provision for water to flow into concealed spaces behind the lining.

### SCOPE OF USE

Newline Acrylic splashbacks are intended for use in the following environments:

- Domestic and commercial bathrooms and laundries, including residential homes, government housing, hotels, and apartments.
- Suitable for use with cold and warm water.
- Used on wall framing that has been prepared correctly as per installation instructions.

### WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

### CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer: Newline Group Ltd

Importer Address for Service: 54 Unutoto Place, Tauranga, 3171

Importer Website: [newline.nz](http://newline.nz)

Importer Email: [info@newline.co.nz](mailto:info@newline.co.nz)

Importer Phone Number: 0508 NEWLINE

### CONDITIONS OF USE

- Newline acrylic splashbacks are intended for use under regulated water temperature that does not exceed 55 degrees Celsius.
- Must be installed in accordance with Newline Acrylic Splashback Installation Manual.
- Cleaning products including bleaches, solvents, alcohol, citrus based chemicals, bath oils, and/or any abrasive cleaner should be used. Full list is outlined in Aftercare Document.
- Should be installed by an experienced tradesman to ensure best outcome.

### SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[Aftercare and Maintenance Doc:](#)

[Warranty Information:](#)

[Instruction Manual:](#)